Abstract | 7915T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	6400 oz./y3 (237.32 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	75.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3454 Sketch



3455 Vignette

3456 Figurative

3457 Contour



3458 Design

3459 Portray

3460 Layout

3461 Plot

3462 Art

Amplify | 7053T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	6416 oz./y3 (237.91 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Carpet Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	73.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3135 Indigo



3136 Royal Purple



3137 Midnight



3138 Chili Red



3139 Crimson



3140 Carob



3142 Sunburst



3143 Medallion



3144 Cyber



3145 Ocean Tro...



3146 Cloud



3147 Parrot



3171 Sky Rocket

Amplify Plank | 7053P

Product Specifications

Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	6416 oz./y3 (237.91 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	73.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Herringbone, Ashlar

Colorways



3136 Royal Purple



3137 Midnight



3138 Chili Red



3139 Crimson



3140 Carob



3141 Matte Lake



3142 Sunburst



3143 Medallion



3144 Cyber



3145 Ocean Tro...



3146 Cloud



3147 Parrot



3171 Sky Rocket

Animated | 7040T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	5791 oz./y3 (214.73 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore SD Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	76.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



2128 Eager



2129 Bouncy



2130 Buoyant

2131 Lively

2132 Vibrant



2133 Exuberant



2134 Perky



2135 Bubbly



2136 Vigorous

Art Deco | 7917T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	5872 oz./y3 (217.74 kg/m3)
Pattern Repeat	24.00" (w) x 24.00" (l) approx. (60.96cm x 60.96cm)
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	75.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3410 Symmetry

3411 Geometric

3412 Streamline

3413 Distinction

3414 Architectu...

3415 Neo Gothic

3416 Individual

3417 Aristocratic

3418 Angularity

Avenue LVT | P1000

LVT

Product Specifications

Wear Layer	12 mil
Thickness	2mm
Finish / Coating	Urethane with Ceramic Micro-Bead
Pattern Repeat	Random Wood Pattern
Edge Treatment	Bevel
Dimensions:	7" x 48"
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial

Packaging

Special Technologies

Added Antimicrobial	Yes

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Flooring Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

0750 Provincial ...

0780 Sugar Maple

0800 Aspen

0820 Rustic Lod...

0830 Weathered C...

0840 Woodland ...

0850 Winchester ...

0860 Driftwood

4001 Playa

4006 Key Largo

4007 Bay of Ple...

Avenue Plus LVT | P1012

LVT

Product Specifications

Wear Layer	12 mil
Thickness	2mm
Finish / Coating	Exceed™ with Ceramic Micro-Bead
Pattern Repeat	Random Wood Pattern
Edge Treatment	Bevel
Dimensions:	7" x 48"
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial

Packaging

Special Technologies

Added Antimicrobial	Yes

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Flooring Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

4021 Coral Coast

4022 Druidstone

4023 Easter Isla...

4024 Cancun



4025 St. Thomas

4026 Clearwater

4027 Grace Bay

4028 Santa Maria

4029 Whitehaven

4030 Secret Lag...

4031 Rio

4032 Kyoto

Backroads Broadloom | 3061B

Product Specifications

Construction	Textured Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	5020 oz./y3 (186.14 kg/m3)
Pattern Repeat	.40" (w) x .50" (l) approx. (1.02cm x 1.27cm)
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **APEX® SDP Polyester Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3285 Gravel Road



3286 Covered Bri...

3287 Sharp Cur...



3288 Amazing V...

3289 Sunday Dr...

3290 Scenic Trip



3291 Roundabout

3292 Adventure



3293 Road Less Tr...

Bespoke Plank | 7616T

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	6056 oz./y3 (224.56 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	73.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Herringbone, Ashlar

Colorways

2768 Made to Me...

2769 Discernme...

2770 Crafted

2771 Artistic

2772 Specialized



2773 Meticulous

2783 Tailored

Blockade | 7039T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	5836 oz./y3 (216.40 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore SD Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	75.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2119 Juncture

2120 Rampart

2121 Sector



2122 Zone

2123 Parcel

2124 Gridlock

2125 District

2126 Quarter

2127 Division

Boulevard LVT | P1001

LVT

Product Specifications

Wear Layer	20 mil
Thickness	2mm
Finish / Coating	Exceed™ with Ceramic Micro-Bead
Pattern Repeat	Random Wood Pattern
Edge Treatment	Bevel
Dimensions:	7" x 48"
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial

Packaging

Special Technologies

Added Antimicrobial	Yes

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Flooring Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

0750 Provincial ...

0780 Sugar Maple

0800 Aspen

0820 Rustic Lod...

0830 Weathered C...

0840 Woodland ...

0850 Winchester ...

0860 Driftwood

4001 Playa

4006 Key Largo

4007 Bay of Ple...

Boulevard Plus LVT | P1020

LVT

Product Specifications

Wear Layer	20 mil
Thickness	2.5mm
Finish / Coating	Exceed™ with Ceramic Micro-Bead
Pattern Repeat	Random Wood Pattern
Edge Treatment	Bevel
Dimensions:	7" x 48"
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial

Packaging

Special Technologies

Added Antimicrobial	Yes

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Flooring Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

4021 Coral Coast

4022 Druidstone

4023 Easter Isla...

4024 Cancun



4025 St. Thomas

4026 Clearwater

4027 Grace Bay

4028 Santa Maria

4029 Whitehaven

4030 Secret Lag...

4031 Rio

4032 Kyoto

Cabled | 7082T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	8627 oz./y3 (319.89 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	76.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2972 Data Link

2973 Connection

2974 Application

2975 Nature

2976 Packet

2977 Session

3165 Satellite

3166 Router

3167 Coaxial

3168 Hardware

3169 Gateway

3170 Modem

Cabled Plank | 7082P

Installation Methods: Herringbone, Ashlar

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	8627 oz./y3 (319.89 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	76.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2972 Data Link

2973 Connection

2974 Application

2975 Nature

2976 Packet

2977 Session

3165 Satellite

3166 Router



3167 Coaxial

3168 Hardware

3169 Gateway

3170 Modem

Cantilever | 7041T

Installation Methods: Quarter Turn

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	7565 oz./y3 (280.52 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore SD Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	76.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2162 Anchors

2163 Deck



2164 Braced Pa...

2165 Foundation

2166 Ties



2167 Struts



2168 Truss

Chivalry | 7233T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Level Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	7378 oz./y3 (273.58 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore SD Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	71.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2641 Loyal

2642 Nobel

2643 Courteous



2644 Honor

2645 Character

2646 Thoughtful



2647 Faithful



2648 Romantic

2649 Defender

2650 Truthful



2651 Humility



2652 Respectful

2653 Justice

2654 Gentleman



2655 Generous

2656 Humanity

Chivalry 20 Broadloom | 3033B

Product Specifications

Construction	Level Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	8163 oz./y3 (302.69 kg/m3)
Pattern Repeat	24.00" (w) x 36.00" (l) approx. (60.96cm x 91.44cm)
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **Encore SD Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



2641 Loyal



2642 Nobel



2643 Courteous

2644 Honor



2645 Character

2646 Thoughtful



2647 Faithful



2648 Romantic



2649 Defender



2650 Truthful



2651 Humility



2652 Respectful

2653 Justice



2654 Gentleman



2655 Generous

2656 Humanity

Chivalry 26 Broadloom | 3034B

Product Specifications

Construction	Level Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	26 oz./sy (882 grams/m2)
Pile Density	6933 oz./y3 (257.08 kg/m3)
Pattern Repeat	24.00" (w) x 36.00" (l) approx. (60.96cm x 91.44cm)
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **Encore SD Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



2641 Loyal



2642 Nobel



2643 Courteous

2644 Honor



2645 Character

2646 Thoughtful



2647 Faithful



2648 Romantic



2649 Defender



2650 Truthful



2651 Humility



2652 Respectful

2653 Justice



2654 Gentleman



2655 Generous

2656 Humanity

Cliffhanger | 7090T

Installation Methods: Herringbone, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	5891 oz./y3 (218.44 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	73.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2791 Tecopa

2792 Trigo

2793 Mescal Ra...

2794 Sierra Peri...



2795 Calico Peak

2796 Iron Moun...

2797 Quijotoa



2798 Black Hills

Colorburst | 7049T

Product Specifications

Construction	Level Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	5482 oz./y3 (203.28 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore SD Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	76.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Quarter Turn

Colorways

QUICKSHIP 3135 Indigo

QUICKSHIP 3136 Royal Purple

QUICKSHIP 3137 Midnight

QUICKSHIP 3138 Red

QUICKSHIP 3139 Crimson

QUICKSHIP 3140 Carob

QUICKSHIP 3141 Matte Lake

QUICKSHIP 3142 Sunburst

QUICKSHIP 3143 Medallion

QUICKSHIP 3144 Cyber

QUICKSHIP 3145 Tropic

QUICKSHIP 3146 Cloud

QUICKSHIP 3147 Parrot

Colorburst Plank | 7049P

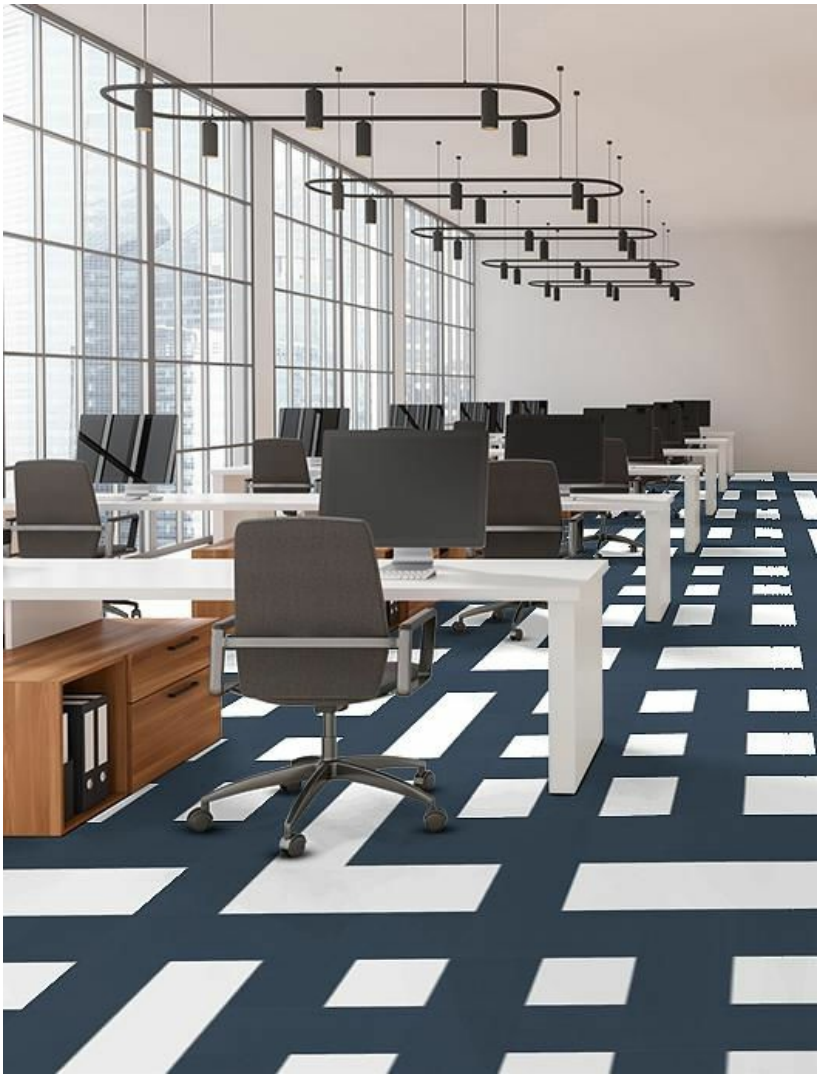

Product Specifications

Construction	Level Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	5482 oz./y3 (203.28 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore SD Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	76.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

QUICKSHIP
3135 Indigo

QUICKSHIP
3136 Royal Purple

QUICKSHIP
3137 Midnight

QUICKSHIP
3138 Red

QUICKSHIP
3139 Crimson

QUICKSHIP
3140 Carob

QUICKSHIP
3141 Matte Lake

QUICKSHIP
3142 Sunburst

QUICKSHIP
3143 Medallion

QUICKSHIP
3144 Cyber

QUICKSHIP
3145 Tropic

QUICKSHIP
3146 Cloud

QUICKSHIP
3147 Parrot

Colorpoint | 7094T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	6000 oz./y3 (222.48 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	73.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3200 Cloud



3201 Smoke

3202 Tortilla



3203 Oyster

3204 Fossil



3205 Iron

3206 Hazlenut

3207 Parchment

3208 Flint

3209 Indigo

3210 Charcoal

3211 Denim

3212 Hickory

3213 Peanut

3214 Granola

Colorpoint Plank | 7094P

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	6000 oz./y3 (222.48 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	73.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Ashlar

Colorways



3200 Cloud



3201 Smoke

3202 Tortilla



3203 Oyster

3204 Fossil



3205 Iron

3206 Hazlenut

3207 Parchment

3208 Flint

3209 Indigo

3210 Charcoal

3211 Denim

3212 Hickory

3213 Peanut

3214 Granola

Diversified | 7037T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	7165 oz./y3 (265.68 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore SD Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	71.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2040 Offbeat

2041 Unique

2042 Discrete

2043 Muddled

2044 Varied



2045 Contrary

2046 Novel

2047 Jumbled

2048 Mingled

2049 Composite

2050 Bizarre

2051 Distinct

Diversified 20 Broadloom | 3036B

Product Specifications

Construction	Textured Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	7983 oz./y3 (296.01 kg/m3)
Pattern Repeat	24.00" (w) x 36.00" (l) approx. (60.96cm x 91.44cm)
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **Encore SD Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2040 Offbeat

2041 Unique

2042 Discrete

2043 Muddled

2044 Varied

2045 Contrary

2046 Novel

2047 Jumbled

2048 Mingled

2049 Composite

2050 Bizarre

2051 Distinct

Diversified 26 Broadloom | 3037B

Product Specifications

Construction	Textured Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	26 oz./sy (882 grams/m2)
Pile Density	7127 oz./y3 (264.27 kg/m3)
Pattern Repeat	24.00" (w) x 36.00" (l) approx. (60.96cm x 91.44cm)
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **Encore SD Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2040 Offbeat

2041 Unique

2042 Discrete

2043 Muddled

2044 Varied

2045 Contrary

2046 Novel

2047 Jumbled

2048 Mingled

2049 Composite

2050 Bizarre

2051 Distinct

Domain Broadloom | 3051B

Product Specifications

Construction	Patterned Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	PureColor® Polyester
Face Weight	26 oz./sy (882 grams/m2)
Pile Density	4478 oz./y3 (166.05 kg/m3)
Pattern Repeat	N/A
Gauge	1/8 (3.15 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3075 Landscapes

3076 Enclave

3077 Realm

3078 Firma

3079 Ambiance

3080 Locale

3081 Habitat

3082 Scenery

3083 Vista

3084 Haven

3085 Abode

3086 Coast

Echo | 7055T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	7958 oz./y3 (295.09 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	75.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3135 Indigo



3136 Royal Purple



3137 Midnight



3138 Chili Red



3139 Crimson



3140 Carob



3141 Matte Lake



3142 Sunburst



3143 Medallion



3144 Cyber



3145 Ocean Tro...



3146 Cloud



3147 Parrot



3171 Skyrocket

Echo Plank | 7055P

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	7958 oz./y3 (295.09 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	75.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Ashlar

Colorways



3135 Indigo

3136 Royal Purple



3137 Midnight



3138 Chili Red

3139 Crimson

3140 Carob

3141 Matte Lake



3142 Sunburst



3143 Medallion

3144 Cyber



3145 Ocean Tro...

3146 Cloud



3147 Parrot



3171 Skyrocket

Element | 7087T

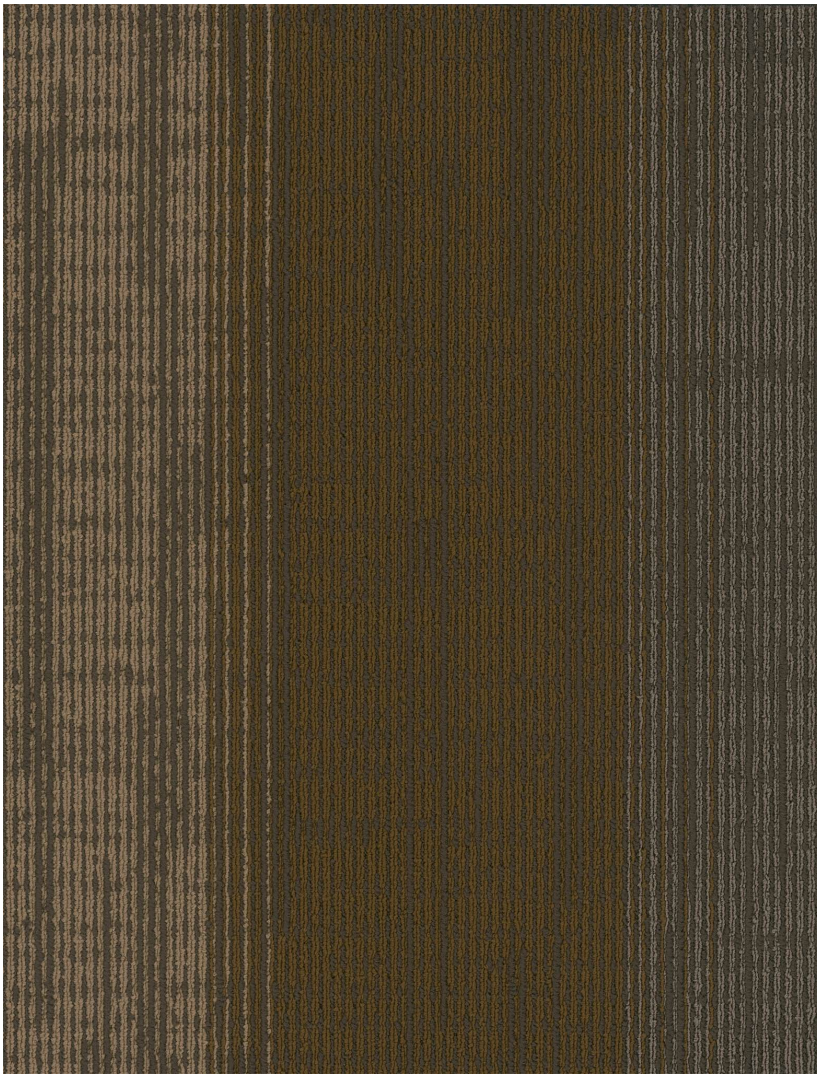

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	6153 oz./y3 (228.16 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore SD Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	76.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3052 Ecliptic



3053 Zodiac

3054 Galaxy

3055 Aurora



3057 Juno



3058 Ceres

3059 Nadir

3060 Zenith

3061 Cosmic

Element Plank | 7087P

Installation Methods: Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	6153 oz./y3 (228.16 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore SD Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	76.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3052 Ecliptic

3053 Zodiac



3054 Galaxy

3055 Aurora

3056 Celestial



3057 Juno



3058 Ceres

3059 Nadir



3061 Cosmic

Entrance Walk-Off | 7447T

Installation Methods: Quarter Turn

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	26 oz./sy (882 grams/m2)
Pile Density	7698 oz./y3 (285.45 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	66.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

1418 Fallow

1419 Café



1420 Pitch



1421 Nickel



1422 Onyx

1423 Noir

Fast Break | 7060T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	5133 oz./y3 (190.33 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	76.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2144 Buzzer Be...

2145 Alley-Oop

2146 Give-and-Go

2147 Coast-to-C...

2148 Run-and-G...

2149 Lay-Up

2150 Slam Dunk

2151 Dunk Shot

2152 Three Poin...

Formation | 7033T

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	14 oz./sy (475 grams/m2)
Pile Density	7300 oz./y3 (270.69 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore SD Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	77.5%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Quarter Turn

Colorways



1873 Company

1874 Array

1875 Channel

1876 Rank

1877 Regiment

1878 Command

1879 Organizati...



1880 Order



1881 Magazine



1882 Squad

1883 Trench

1884 Division

Grandview Broadloom | 3060B

Product Specifications

Construction	Textured Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	8181 oz./y3 (303.36 kg/m3)
Pattern Repeat	.40" (w) x 1.20" (l) approx. (1.02cm x 3.05cm)
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **APEX® SDP Polyester Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3238 Great Barrier...

3239 Great Wall

3240 Aurora Bore...

3241 Eiffel Tower

3242 Taj Mahal

3243 Alps


3244 Stonehenge

3245 Yosemite

3246 Grand Can...

Homepage | 6652B

Product Specifications

Construction	Patterned Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	6063 oz./y3 (224.82 kg/m3)
Pattern Repeat	24.00" (w) x 15.00" (l) approx. (60.96cm x 38.10cm)
Gauge	1/12 (4.72 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **APEX® SDP Polyester Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3534 Redirect

3535 Domain

3536 Filter

3537 Search

3538 Hosting

3539 Image Ove...

3540 Wireframe

3541 Meta Tag

3542 Cookies

Homepage | 7552T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	5414 oz./y3 (200.75 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	71.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3534 Redirect

3535 Domain

3536 Filter

3537 Search

3538 Hosting

3539 Image Ove...

3540 Wireframe

3541 Meta Tag

3542 Cookies

Hyperlink | 6651B

Product Specifications

Construction	Patterned Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	6261 oz./y3 (232.16 kg/m3)
Pattern Repeat	12.00" (w) x 10.50" (l) approx. (30.48cm x 26.67cm)
Gauge	1/12 (4.72 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **APEX® SDP Polyester Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3534 Redirect

3535 Domain

3536 Filter

3537 Search

3538 Hosting

3539 Image Ove...



3540 Wireframe

3541 Meta Tag

3542 Cookies

Hyperlink | 7551T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	5414 oz./y3 (200.75 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	71.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3534 Redirect

3535 Domain

3536 Filter

3537 Search

3538 Hosting

3539 Image Ove...



3540 Wireframe

3541 Meta Tag

3542 Cookies

Hypnotic | 7910T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	6127 oz./y3 (227.19 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	75.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3463 Mesmerizi...



3464 Trance

3465 Soothing

3466 Numbing

3467 Spellbound



3468 Mesmeric



3469 Soporific



3470 Bewitch

3471 Nirvana

Influencer | 7095T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	6662 oz./y3 (247.03 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	75.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3248 Advocate

3249 Referer

3250 Loyalist

3251 Marketing

3252 Network

3253 Mavens

3254 Vlogger

3255 Blogger

3256 Media

3257 Brand

Linea | 7568T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	6275 oz./y3 (232.68 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	75.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2213 Straight For...

2214 Groove

2215 Beeline

3301 In-Line

3309 Nonstop

3311 Plumb

3312 Tangent

3314 Axis

3315 Weft

Magnify | 7054T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	6416 oz./y3 (237.91 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	73.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3135 Indigo



3136 Royal Purple



3137 Midnight



3138 Chili Red

3139 Crimson



3140 Carob

3141 Matte Lake



3142 Sunburst



3143 Medallion



3144 Cyber



3145 Ocean Tro...



3146 Cloud



3147 Parrot



3171 Skyrocket

Magnify Plank | 7054P

Installation Methods: Herringbone, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	6416 oz./y3 (237.91 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	73.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3135 Indigo



3136 Royal Purple



3137 Midnight



3138 Chili Red



3139 Crimson



3140 Carob



3141 Matte Lake

3142 Sunburst

3143 Medallion



3144 Cyber



3145 Ocean Tro...



3146 Cloud



3147 Parrot

3171 Skyrocket

Oasis | 7477T

Installation Methods: Quarter Turn, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	5829 oz./y3 (216.14 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	73.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2784 Sahara



2785 Gobi

2786 Karakum

2787 Mojave

2788 Sonoran

2789 Basin

2790 Namib

Oasis Broadloom | 3477B

Product Specifications

Construction	Patterned Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	18 oz./sy (610 grams/m2)
Pile Density	6527 oz./y3 (242.03 kg/m3)
Pattern Repeat	3.00" (w) x 5.50" (l) approx. (7.62cm x 13.97cm)
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **APEX® SDP Polyester Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2784 Sahara

2785 Gobi

2786 Karakum

2787 Mojave

2788 Sonoran

2789 Basin

2790 Namib

Omnia Broadloom | 6911B

Product Specifications

Construction	Cut and Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	6545 oz./y3 (242.69 kg/m3)
Pattern Repeat	24.00" (w) x 36.00" (l) approx. (60.96cm x 91.44cm)
Gauge	1/12 (4.72 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **APEX® SDP Polyester Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3388 Certainty



3389 Matter of ...


3390 Cold Hard F...

3391 Done Deal

3392 Fact of Life



3393 Sure Thing



3394 All Sewn Up



3395 Sure Bet

3396 Shoo-In

Outlaw Broadloom | 3053B

Product Specifications

Construction	Level Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	7427 oz./y3 (275.40 kg/m3)
Pattern Repeat	.60" (w) x .10" (l) approx. (1.52cm x .25cm)
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **APEX® SDP Polyester Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3087 Bandit

3088 Desperado

3089 Fugitive



3090 Hoodlum



3091 Marauder

3092 Outcast



3093 Hooligan

3094 Mobster

Parkway LVT | P1002

LVT

Product Specifications

Wear Layer	20 mil
Thickness	5mm
Finish / Coating	Urethane with Ceramic Micro-Bead
Pattern Repeat	Random Wood Pattern
Edge Treatment	Bevel
Dimensions:	7" x 48"
Standard Adhesive	Commercialon® LVT Adhesive
Backing Class	Commercial Grade
Commercial Traffic	Heavy Commercial

Packaging

Special Technologies

Added Antimicrobial	Yes

Environmental Specifications & Tests

Indoor Air Quality	FloorScore® Certified
LEED v4	Contributes to IAQ: Low Emitting Materials
End of Life	100% Recyclable
Class / ASTM F1700	Class III Printed Film Vinyl Plank - Type B (embossed)
Flooring Radiant Panel	Class 1
ADA Compliance	Compliant For Accessible Routes

ASTM F2055 (Size and Tolerance)	Passes
ASTM F386 (Thickness)	Passes
ASTM F1914 (Residual Indentation)	Passes
ASTM F137 (Flexibility)	Passes
ASTM F2199 (Dimensional Stability)	Passes
ASTM F925 (Chemical Resistance)	Passes
ASTM F1514 (Resistance to Heat)	Passes
ASTM F1515 (Resistance to Light)	Passes
ASTM E648 (Critical Radiant Flux)	Passes
ASTM E662 (Optical Smoke Density)	Passes
ASTM C1028 (Slip Resistance)	Passes
ASTM F970 (Static Load)	Passes

Colorways

001 Straw

002 Twig

003 Sunglow

004 Autumn Leaf

005 Fossil

006 Barktone

007 Cocoa

008 Suede Gray

009 Cloud

010 Shadow

Podcast® | 6653B

Product Specifications

Construction	Patterned Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	6691 oz./y3 (248.11 kg/m3)
Pattern Repeat	24.00" (w) x 26.50" (l) approx. (60.96cm x 67.31cm)
Gauge	1/12 (4.72 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **APEX® SDP Polyester Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3534 Redirect

3535 Domain

3536 Filter

3537 Search



3538 Hosting

3539 Image Ove...

3540 Wireframe



3541 Meta Tag

3542 Cookies

Podcast® | 7553T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	5414 oz./y3 (200.75 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	71.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3534 Redirect

3535 Domain

3536 Filter

3537 Search



3538 Hosting



3539 Image Ove...

3540 Wireframe

3541 Meta Tag

3542 Cookies

Quicksilver 20 Broadloom | 3040B

Product Specifications

Construction	Textured Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	6786 oz./y3 (251.63 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **APEX® SDP Polyester Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2153 Cobalt

2154 Helium

2155 Platinum

2156 Xenon

2157 Titanium

2158 Carbon

2159 Iridium

2160 Mercury

2161 Silicon

2162 Tungsten

Quicksilver 26 Broadloom | 3041B

Product Specifications

Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	26 oz./sy (882 grams/m2)
Pile Density	7488 oz./y3 (277.66 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **APEX® SDP Polyester Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2153 Cobalt

2154 Helium

2155 Platinum

2156 Xenon

2157 Titanium

2158 Carbon

2159 Iridium

2160 Mercury

2161 Silicon

2162 Tungsten

Reverb | 7056T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	7243 oz./y3 (268.58 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	75.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3135 Indigo



3136 Royal Purple



3137 Midnight



3138 Chili Red



3139 Crimson

3140 Carob



3141 Matte Lake



3142 Sunburst



3143 Medallion



3144 Cyber



3145 Ocean Tro...



3146 Cloud



3147 Parrot

Reverb Plank | 7056P

Installation Methods: Herringbone, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	7243 oz./y3 (268.58 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	75.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3135 Indigo

3136 Royal Purple

3137 Midnight

3138 Chili Red

3139 Crimson

3140 Carob

3141 Matte Lake

3142 Sunburst

3143 Medallion

3144 Cyber

3145 Ocean Tro...

3146 Cloud

3147 Parrot

Revival | 7043T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	6275 oz./y3 (232.68 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	75.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2211 Renewal

2212 Awakening

2213 Stimulus

2214 Eye-Opener

2215 Scoop

2216 Impact

Revolution | 7044T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	6270 oz./y3 (232.50 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	75.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

1812 Shake-up

1813 Transform...

1814 Mutiny

1815 Uproar

1816 Turmoil

1817 Revolt

1818 Uprising

Rogue Broadloom | 3052B

Product Specifications

Construction	Enhanced Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	4565 oz./y3 (169.27 kg/m3)
Pattern Repeat	.80" (w) x 3.40" (l) approx. (2.03cm x 8.64cm)
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **APEX® SDP Polyester Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3087 Bandit

3088 Desperado

3089 Fugitive



3090 Hoodlum

3091 Marauder

3092 Outcast

3093 Hooligan

3094 Mobster

Sidewinder | 7617T

Product Specifications

Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	7362 oz./y3 (272.99 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	75.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Installation Methods: Quarter Turn

Colorways



2759 Arid Gray



2760 Desert Spr...

2761 Mica Dust

2762 Camelback



2763 Silver Mine

2764 Caravan



2765 Indian Paint

2766 Night Sky

2767 Obsidian

Sidewinder Broadloom | 3617B

Product Specifications

Construction	Patterned Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	6396 oz./y3 (237.17 kg/m3)
Pattern Repeat	72.00" (w) x 30.00" (l) approx. (182.88cm x 76.20cm)
Gauge	1/12 (4.72 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **APEX® SDP Polyester Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



2759 Gray



2760 Spring

2761 Dust

2762 Camelback



2763 Mine

2764 Caravan



2765 Paint

2766 Sky



2767 Obsidian

Stenciled | 7912T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	16 oz./sy (543 grams/m2)
Pile Density	4645 oz./y3 (172.24 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	75.3%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3445 Guide



3446 Molded

3447 Patterning



3448 Template

3449 Impression



3450 Depression



3451 Stamped

3452 Structured



3453 Repeat

Streaming | 7237T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	7249 oz./y3 (268.80 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore SD Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	76.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2934 High Definit...

2935 4K

2936 Adaptive

2937 Wi-Fi

2938 Html

2939 Graphics

2940 Buffering

2941 Firewall

2942 Bandwidth

2944 Aspect

2945 Latency

2946 Encoding

Streaming 20 Broadloom | 3048B

Product Specifications

Construction	Textured Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	8288 oz./y3 (307.32 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **Encore SD Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2934 High Definit...

2935 4K

2936 Adaptive

2937 Wi-Fi

2938 Html

2939 Graphics

2940 Buffering

2941 Firewall

2942 Bandwidth

2944 Aspect

2945 Latency

2946 Encoding

Streaming 26 Broadloom | 3049B

Product Specifications

Construction	Textured Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	26 oz./sy (882 grams/m2)
Pile Density	6600 oz./y3 (244.73 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **Encore SD Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2934 High Definit...

2935 4K

2936 Adaptive

2937 Wi-Fi

2938 Html

2939 Graphics

2940 Buffering

2941 Firewall

2942 Bandwidth



2944 Aspect

2945 Latency

2946 Encoding

Techtonic | 7042T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	6740 oz./y3 (249.92 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore SD Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	76.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

2173 Cache

2174 Encryption

2175 BIOS

2176 PDF

2177 Server



2178 ISP

2179 Driver

2180 Registry

2181 Framework

Terrain Broadloom | 3050B

Product Specifications

Construction	Textured Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	PureColor® Polyester
Face Weight	32 oz./sy (1085 grams/m2)
Pile Density	4708 oz./y3 (174.58 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3075 Landscapes

3076 Enclave

3077 Realm



3078 Firma

3079 Ambiance

3080 Locale

3081 Habitat

3082 Scenery

3083 Vista

3084 Haven

3085 Abode

3086 Coast

Universe | 7086T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	6300 oz./y3 (233.61 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore SD Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	76.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

3052 Ecliptic

3053 Zodiac



3054 Galaxy

3055 Aurora

3056 Celestial

3057 Juno



3058 Ceres

3059 Nadir

3060 Zenith

3061 Cosmic

Universe Plank | 7086P

Installation Methods: Herringbone, Ashlar

Product Specifications

Construction	Patterned Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	Encore® SD Nylon
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	6300 oz./y3 (233.61 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	12" x 48" approx. (30.48cm x 121.92cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **Encore SD Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	76.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3052 Ecliptic

3053 Zodiac

3054 Galaxy

3055 Aurora

3056 Celestial

3057 Juno

Uplink | 7050T

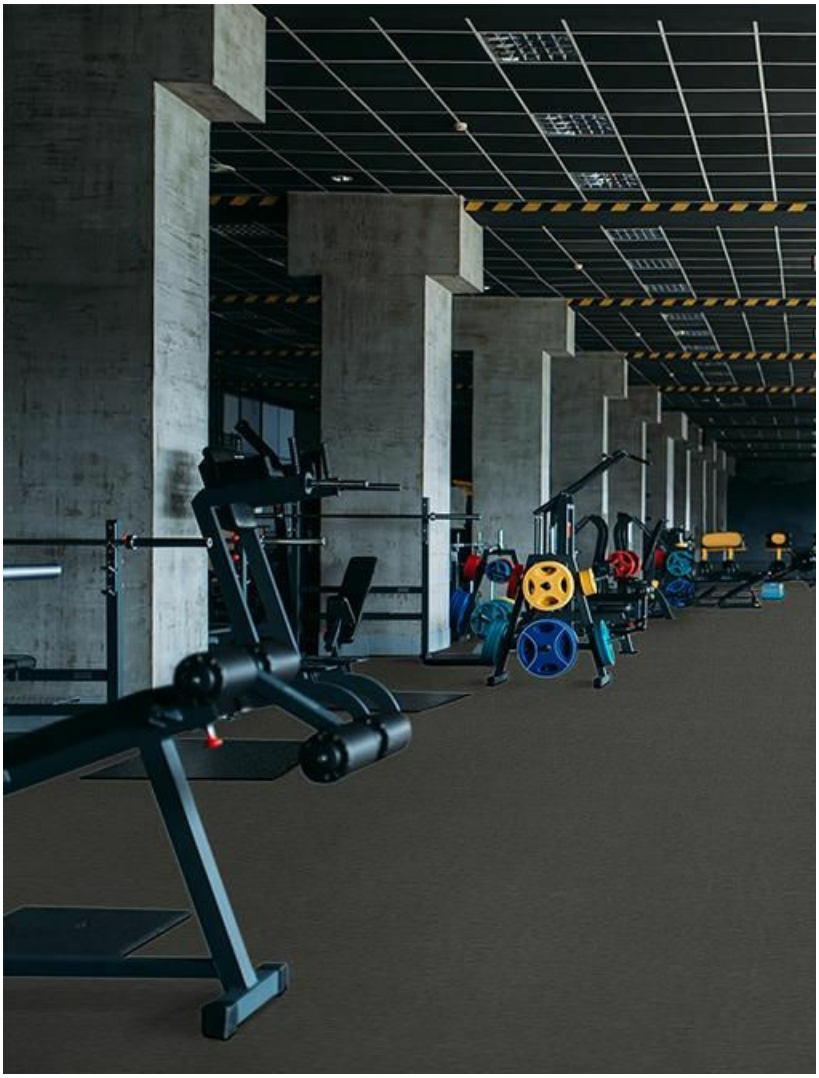

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	5133 oz./y3 (190.33 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	76.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

QUICKSHIP 185 Fiesta

QUICKSHIP 2152 Tungsten

QUICKSHIP 3120 Shadow

QUICKSHIP 3121 Charcoal

QUICKSHIP 3122 Denim

QUICKSHIP 3123 Praline

QUICKSHIP 3124 Red

QUICKSHIP 3125 Pewter

QUICKSHIP 3126 Steel

QUICKSHIP 3127 Noir

QUICKSHIP 3128 Licorice

QUICKSHIP 3129 Ash

QUICKSHIP 3130 Brown

QUICKSHIP 3131 Pecan

QUICKSHIP 316 Royal

QUICKSHIP 860 London Fog

QUICKSHIP 997 Caviar

Uplink 20 Broadloom | 3058B

Product Specifications

Construction	Textured Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	6786 oz./y3 (251.63 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **APEX® SDP Polyester Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways

QUICKSHIP 185 Fiesta

QUICKSHIP 2152 Tungsten

QUICKSHIP 3120 Shadow

QUICKSHIP 3121 Charcoal

QUICKSHIP 3122 Denim

QUICKSHIP 3123 Praline

QUICKSHIP 3124 Red

QUICKSHIP 3125 Pewter

QUICKSHIP 3126 Steel

QUICKSHIP 3127 Noir

QUICKSHIP 3128 Licorice

QUICKSHIP 3129 Ash

QUICKSHIP 3130 Brown

QUICKSHIP 3131 Pecan

QUICKSHIP 316 Royal

QUICKSHIP 860 London Fog

QUICKSHIP 997 Caviar

Uplink 26 Broadloom | 3059B

Product Specifications

Construction	Textured Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	26 oz./sy (882 grams/m2)
Pile Density	7488 oz./y3 (277.66 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Carpet Adhesive
Standard Warranties	**Standard Back** **APEX® SDP Polyester Fiber**
Optional Warranties	**iLoc® Backing**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 3 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



185 Fiesta

2152 Tungsten

3120 Shadow

3121 Charcoal

3122 Denim

3123 Praline

3124 Red



3125 Pewter

3126 Steel



3127 Noir

3128 Licorice

3129 Ash

3130 Brown

3131 Pecan

316 Royal

860 London Fog



997 Caviar

Uplink Groove | 7289T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Construction	Textured Loop
Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	15 oz./sy (509 grams/m2)
Pile Density	5133 oz./y3 (190.33 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	76.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



185 Fiesta

2152 Tungsten

3120 Shadow

3121 Charcoal

3122 Denim

3123 Praline

3124 Red

3125 Pewter

3126 Steel



3128 Licorice

3129 Ash

3130 Brown

3131 Pecan

316 Royal

860 London Fog



997 Caviar

Uplink Lite Broadloom | 3057B

Product Specifications

Construction	Textured Loop
Backing	Woven Polypropylene
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	13 oz./sy (441 grams/m2)
Pile Density	4431 oz./y3 (164.30 kg/m3)
Pattern Repeat	N/A
Gauge	1/10 (3.94 rows/cm)
Standard Width	12 ft 3.66 m
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Standard Back** **APEX® SDP Polyester Fiber**
Optional Warranties	**Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	N/A Certified
Total Recycled Content	0%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



185 Fiesta

3120 Shadow

3121 Charcoal

3122 Denim

3123 Praline

3124 Red



3125 Pewter

3126 Steel

3128 Licorice

3129 Ash

3130 Brown

3131 Pecan

316 Royal

860 London Fog



997 Caviar

Veritas | 7911T

Installation Methods: Brick, Quarter Turn, Monolithic, Ashlar

Product Specifications

Backing	Nexus® Modular
Dye Method	Solution Dyed
Fiber Type	APEX SDP® Polyester
Face Weight	20 oz./sy (678 grams/m2)
Pile Density	5414 oz./y3 (200.75 kg/m3)
Pattern Repeat	N/A
Gauge	1/12 (4.72 rows/cm)
Standard Size	24" x 24" approx. (60.96cm x 60.96cm)
Standard Adhesive	Commercialon Premium Modular Adhesive
Optional Adhesive	TileTabs
Standard Warranties	**Nexus Modular** **Commercialon Adhesive for Modular Carpet & LVT** **APEX® SDP Polyester Fiber**
Optional Warranties	**Commercialon High Moisture Adhesive for Modular Carpet and LVT** **Tile Tabs**

Special Technologies

Environmental Specifications & Tests

NSF 140:	Gold Certified
Total Recycled Content	71.4%
Flooring Radiant Panel	Class 1
Smoke Density	Less then 450 flaming (ASTM E 662)
Static Test	Less then 4 kv (AATCC-134)
ADA Compliance	Compliant For Accessible Routes
Pill Test	Yes
Lightfastness	Yes

Colorways



3388 Certainty

3389 Matter of ...

3390 Cold Hard F...

3391 Done Deal



3392 Fact of Life



3393 Sure Thing



3394 All Sewn Up



3395 Sure Bet

3396 Shoo-In